


Navigation lights on powered vessels – 12 metres to 20 metres

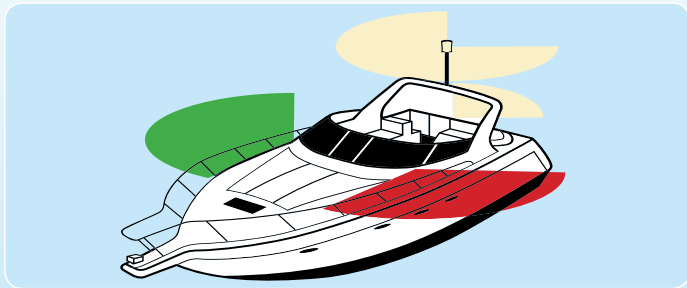


Vessels underway*

Power vessels more than 12 metres in length but less than 20 metres in length shall exhibit:

- A masthead light, separate sidelights and stern light or;
- A masthead light, combined sidelights and stern light.

The masthead light shall be carried at least 2.5 metres above the gunwale. Combined sidelights shall be carried at least 1 metre below the masthead light.

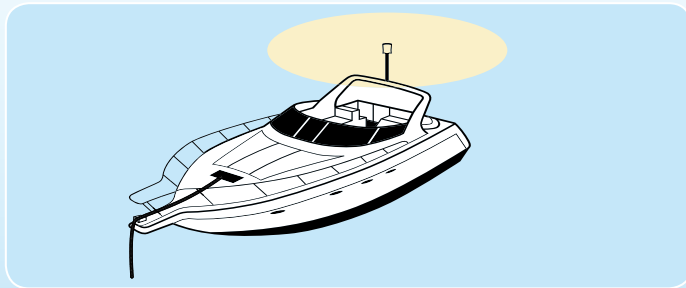

Vessels at anchor – under 50 metres

Vessels less than 50 metres in length at anchor, shall exhibit an all round white light placed where it may best be seen. Anchor lights must always be shown from sunset to sunrise.

If you are at anchor or in a busy area, then show additional lights to ensure you are seen and keep a good watch.

*Sailing vessels while underway (being motor driven) shall exhibit navigation lights applicable to power driven vessels.

This publication is intended as general information only and is not a substitute for the relevant legislation, legal or professional advice. For more information call 1800 223 022 or visit www.transportsafety.vic.gov.au